

## **KWIKSTAGE SYSTEM PRODUCT CATALOG**

WWW.APACSCAFFOLD.COM




## TABLE OF CONTENTS

02

### **ABOUT APAC OVERVIEW COMPONENTS**

Kwikstage Standard Kwikstage Ledger Kwikstage Transom Kwikstage Diagonal Brace Kwikstage Tie Bar Kwikstage Hop up Bracket Kwikstage Steel Planks Kwikstage Lapping Plate Kwikstage Mesh Guard Ladder Access Transom Kwikstage Ledger Transoms Kwikstage Aluminum Stair Kwikstage Stair Handrails Aluminum Stretcher Stair Solid Base Jack Swivel Base Jack Kwikstage U Head Jack End Toe Board Bracket Toe Board Bracket **Double C Clips** Kwikstage Gaurdrail Post LVL Scaffold Planks Fire Retardant Containment Mesh Chain Wire & Scaffmesh Scaffold Rack Scaffold Cage

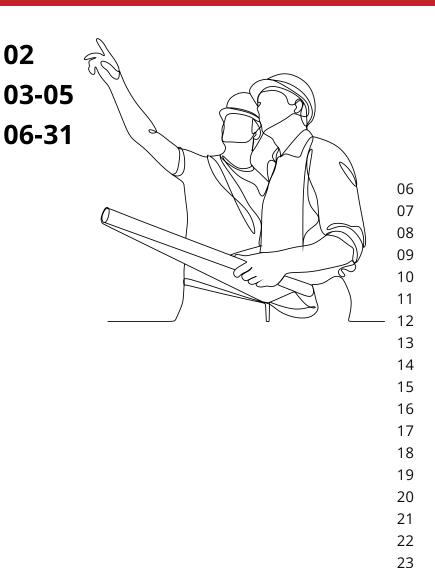

24

25

26

27

28

29 30

31

01

### **APAC SCAFFOLD**

ABOUT



Founded in 2004, APAC scaffold specializes in supplying of system scaffolding & falseworks.

The company has always strived to set and maintain the very highest of standard in safety and the supply of the highest quality formwork and scaffolding components.

Our key products:Ringlock scaffolding system, Cuplock scaffolding system, Aluminum scaffolding system, Shoring props and Formwork Products.Focus on the technical development and to meet the needs of our customers we adopt a lot of new technology and inspirational ideas to our products.

Our scaffoldings which are widely used in residential, shipbuilding, mining, insulation, oil & petroleum, airports, bridges etc.

# **OVERVIEW**

### **APAC'S Capabilities**

### [ EXPERTISE ]

Between most our team members we have decades of experience in the industry. Many sales are mechanical background, can better understand the customer's project needs, in our view, this is very important in international trade, is conducive to less customer communication costs.

In dealing with us, you have the benefit of dealing with an experienced,professional, and motivated team who's committed to attention to detail, working to a budget, a timeline and qualified products.

### [ PRODUCTIVITY ]

APAC Scaffold is a professional construction material supplier, producing various equipment for construction industry, such as Aluminium scaffolding, ringlock scaffolding, shoring prop, and related accessories.

We operate professional production workshops and equipment, including punching machines, welding machines, pipe cutting machines, shearing machines, bending machines, screw machines etc. After years of hard work, we can produce up to 30,000 tons of equipments annually and our products are sold in many countries.

### [ QUALITY ASSURANCE ]

We have established a quality assurance department to make sure that our products meet customer requirements. Based on the ISO9001 Quality Management System, our professional team strictly examines every procedure, from supplier verification to examination of raw materials, production, and finished products, to ensure the high quality of products.

We fully understand the scaffolding standard such as

EN12811,EN12810,AS/NZS1576.2, ANSI/SSFI SC100-5/05, NCH2501, GOST 27321-2018 and GOST 24258-88 for different countries.

**OVERVIEW** 

#### **Product Traceability**

All APAC scaffold componets are stamped with traceability marks.

Batch Number : APACYYXXXX APAC= APAC Scaffold YY= Year of Manufacture XXXX= Order Number

**KEY** 








DVERVIEW

#### Components

#### **Component Identification**

The diagram below shows the most common Kwikstage components used. Most scaffolding structures are made from these basic components, however, the Kwikstage system comes with a variety of accessories to meet all your scaffolding requirements.

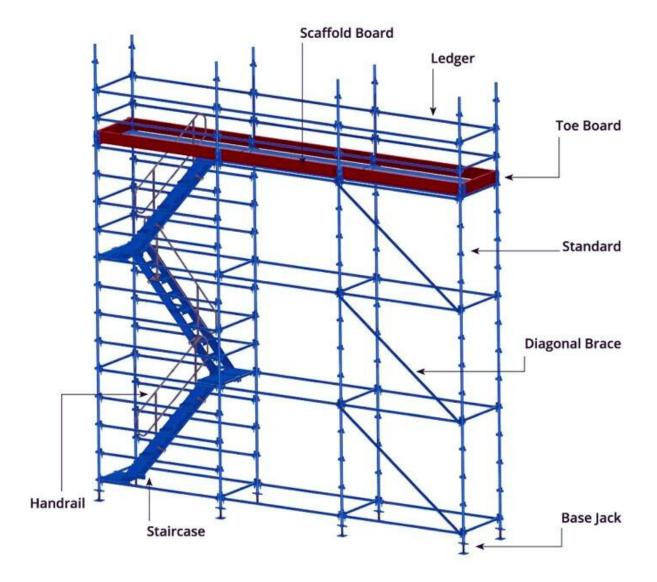



#### Kwikstage Standard

Kwikstage Standard (Vertical) has (V) pressingsin clusters at 495 mm centres, Tube size: OD48.3x4.0mm, Steel Grade:S235 or Tube size: OD48.3x3.5mm, Steel Grade:S355. Surface treatment: Baking paint or Hot dip galvanized.



| Item No     | em No. Description               | Height | Weight | Pack | aging |
|-------------|----------------------------------|--------|--------|------|-------|
| iteliitiit. |                                  | Meters | kgs    | Qty. | Туре  |
| AS-KS03     | 0.3m Kwikstage Standard w/spigot | 0.3    | 2.45   | 300  | Rack  |
| AS-KW05     | 0.5m Kwikstage Standard w/spigot | 0.5    | 3.20   | 200  | Rack  |
| AS-KW10     | 1.0m Kwikstage Standard w/spigot | 1.0    | 5.75   | 100  | Rack  |
| AS-KS15     | 1.5m Kwikstage Standard w/spigot | 1.5    | 8.30   | 100  | Rack  |
| AS-KS20     | 2.0m Kwikstage Standard w/spigot | 2.0    | 10.9   | 100  | Rack  |
| AS-KS25     | 2.5m Kwikstage Standard w/spigot | 2.5    | 13.4   | 100  | Rack  |
| AS-KS30     | 3.0m Kwikstage Standard w/spigot | 3.0    | 16.0   | 100  | Rack  |

**VAPAC** 

#### **Kwikstage Ledger**

Kwikstage Ledgers is horizontal member of the scaffold system also known as guard rails. Tube size: OD48.3x3.2mm, Steel Grade:S235. Ledgers fit into the upper (V) Pressings on the standards.



| ltem No. | Description           | Length | Weight | Pack | aging |
|----------|-----------------------|--------|--------|------|-------|
|          |                       | Meters | kgs    | Qty. | Туре  |
| AS-KL056 | 0.5m Kwikstage Ledger | 0.56   | 2.25   | 300  | Rack  |
| AS-KL076 | 0.7m Kwikstage Ledger | 0.76   | 3.15   | 300  | Rack  |
| AS-KL081 | 0.8m Kwikstage Ledger | 0.81   | 3.53   | 300  | Rack  |
| AS-KL127 | 1.2m Kwikstage Ledger | 1.27   | 5.00   | 150  | Rack  |
| AS-KL183 | 1.8m Kwikstage Ledger | 1.83   | 6.70   | 150  | Rack  |
| AS-KL244 | 2.4m Kwikstage Ledger | 2.44   | 8.53   | 150  | Rack  |

**PAPAC** 

#### Kwikstage Transom

Kwikstage Transoms are made by welding two 5.00 mm angles back to back. Transoms fit into the lower (V) pressings on the standards to carry steel boards which make a safe working platform.



| Item No. Description | Description  | Length | Weight | Pack | aging |
|----------------------|--------------|--------|--------|------|-------|
|                      |              | Meters | kgs    | Qty. | Туре  |
| AS-KT056             | 0.5m Transom | 0.56   | 4.5    | 150  | Rack  |
| AS-KT076             | 0.7m Transom | 0.76   | 5.4    | 150  | Rack  |
| AS-KT081             | 0.8m Transom | 0.81   | 5.6    | 150  | Rack  |
| AS-KT127             | 1.2m Transom | 1.27   | 9.3    | 75   | Rack  |
| AS-KT183             | 1.8m Transom | 1.83   | 16.4   | 75   | Rack  |
| AS-KT244             | 2.4m Transom | 2.44   | 23.2   | 75   | Rack  |

**VAPAC** 

#### Kwikstage Diagonal Brace

Diagonal Braces provides strength and stability to the scaffold. They fit diagonally across the scaffold bay. They can be used for handrail to strecther stairs.



| ltem No.  | Description         | Length | Weight | Pack | aging |
|-----------|---------------------|--------|--------|------|-------|
|           |                     | Meters | kgs    | Qty. | Туре  |
| AS-KDB170 | 1.7m Diagonal Brace | 1.7    | 7.0    | 100  | Rack  |
| AS-KDB210 | 2.1m Diagonal Brace | 2.1    | 8.0    | 100  | Rack  |
| AS-KDB270 | 2.7m Diagonal Brace | 2.7    | 10.5   | 100  | Rack  |
| AS-KDB320 | 3.2m Diagonal Brace | 3.2    | 11.7   | 100  | Rack  |
| AS-KDB360 | 3.6m Diagonal Brace | 3.6    | 12.7   | 100  | Rack  |

#### Kwikstage Tie Bar

Tie bars have pins at each ends which fit in holes of 2 and 3 board stage brackets (hopups) to prevent the brackets from spreading and the planks from becoming dislodged.



| ltem No.    | Description  | Length | Weight | Pack | aging |
|-------------|--------------|--------|--------|------|-------|
| iteliirite. | ·            | Meters | kgs    | Qty. | Туре  |
| AS-KTB056   | 0.5m Tie Bar | 0.56   | 1.4    | 300  | Rack  |
| AS-KTB076   | 0.7m Tie Bar | 0.76   | 1.9    | 300  | Rack  |
| AS-KTB127   | 1.2m Tie Bar | 1.27   | 3.0    | 150  | Rack  |
| AS-KTB183   | 1.8m Tie Bar | 1.83   | 4.5    | 150  | Rack  |
| AS-KTB244   | 2.4m Tie Bar | 2.44   | 5.8    | 150  | Rack  |

**APAC** 10

#### Kwikstage Hop up Bracket

Board Stage Brackets / hopups fit into the (V) pressing of the standard which is nearest to the wall. The 2 & 3 BSB have holes into which tie bar pins are attached. They are used to provide cantilevered platform on the inside of the scaffold nearest the wall.



| Item No. Description | Length                  | Weight | Pack | aging |      |
|----------------------|-------------------------|--------|------|-------|------|
|                      |                         | Meters | kgs  | Qty.  | Туре |
| AS-KHUB1             | 1 Board Hop up Bracket  | 0.28   | 2.3  | 200   | Rack |
| AS-KHUB2             | 2 Boards Hop up Bracket | 0.53   | 6.3  | 40    | Rack |
| AS-KHUB3             | 3 Boards Hop up Bracket | 0.78   | 11.1 | 40    | Rack |

#### Kwikstage Steel Planks

Steel Planks are manufactured from Pre Galvanised steel sheet pressed to a hollow shape 60 mm High x 230mm wide. Steel Planks are strong, durable and light in weight. They fit neatly sit on the (V) section of 2 transoms. giving a non slip surface and a working deck.



| Item No. Description | Length           | Weight | Pack | aging |      |
|----------------------|------------------|--------|------|-------|------|
|                      |                  | Meters | kgs  | Qty.  | Туре |
| AS-KSP076            | 0.7m Steel Plank | 0.76   | 5    | 100   | Rack |
| AS-KSP127            | 1.2m Steel Plank | 1.27   | 8    | 50    | Rack |
| AS-KSP183            | 1.8m Steel Plank | 1.83   | 12   | 50    | Rack |
| AS-KSP244            | 2.4m Steel Plank | 2.44   | 15   | 50    | Rack |

**VAPAC** 

### Lapping Plate

Steel lapping plates have a folded returned to lock in between steel boards. Lap plates / panels fills the gaps minimising trip hazard and deck weight variances.



| Item No. | Item No. Description   | Length | Length | Weight | Pack | aging |
|----------|------------------------|--------|--------|--------|------|-------|
| item No. |                        | Meters | Width  | kgs    | Qty. | Туре  |
| AS-KLP1  | 1 Board Lapping Plate  | 0.7    | 0.23   | 4.2    | 450  | Rack  |
| AS-KLP2  | 2 Boards Lapping Plate | 0.7    | 0.46   | 9.4    | 300  | Rack  |
| AS-KLP3  | 3 Boards Lapping Plate | 0.7    | 0.68   | 13.7   | 225  | Rack  |

#### Mesh Guard

Kwikstage Mesh Guard is a safety component used in conjunction with Kwikstage system scaffolding. Kwikstage mesh guard reduced the risk of materials and small parts falling from the scaffolding structure.




| ltem No.  | Description                | Length | Weight | Pack | aging |
|-----------|----------------------------|--------|--------|------|-------|
|           |                            | Meters | kgs    | Qty. | Туре  |
| AS-KMG127 | Kwikstage Mesh Guard 1.27m | 1.29   | 12.8   | 35   | Rack  |
| AS-KMG183 | Kwikstage Mesh Guard 1.83m | 1.85   | 17.6   | 35   | Rack  |
| AS-KMG244 | Kwikstage Mesh Guard 2.44m | 2.46   | 22.6   | 30   | Rack  |

**VAPAC** 

#### Ladder Access Transom

Transom component used for insertion into scaffold bay. Allows installation of a ladder opening within the scaffold deck.

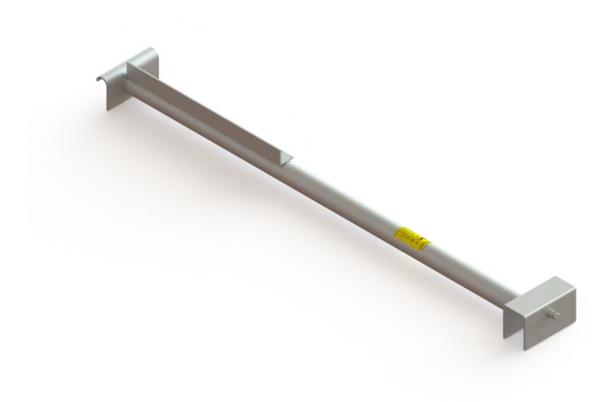

| ltem No.   | Description                | Length | Weight | Pack | aging |
|------------|----------------------------|--------|--------|------|-------|
|            |                            | Meters | kgs    | Qty. | Туре  |
| AS-KLAT076 | 0.7m Ladder Access Transom | 0.76   | 5.3    | 200  | Rack  |
| AS-KLAT127 | 1.2m Ladder Access Transom | 1.27   | 11.27  | 100  | Rack  |
| AS-KLAT183 | 1.8m Ladder Access Transom | 1.83   | 16.86  | 100  | Rack  |
| AS-KLAT244 | 2.4m Ladder Access Transom | 2.44   | 22.06  | 100  | Rack  |

#### **Kwikstage Ledger Transoms**

Heavy duty back to back angle transoms for location of scaffold boards. These are used to where greater loads are required for pedestrain access.



| ltem No.  | Description                    | Length | Weight | Pack | aging |
|-----------|--------------------------------|--------|--------|------|-------|
|           |                                | Meters | kgs    | Qty. | Туре  |
| AS-KLT127 | 1.2m Kwikstage Ledger Transoms | 1.27   | 19     | 15   | Rack  |
| AS-KLT183 | 1.8m Kwikstage Ledger Transoms | 1.83   | 32     | 15   | Rack  |
| AS-KLT244 | 2.4m Kwikstage Ledger Transoms | 2.44   | 42     | 15   | Rack  |

#### Aluminum Stair

These Aluminium stairs are designed specifically for use with the steel kwikstage modular scaffolding system.


They are pre-fabricated and designed to fit in a 1.2m x 2.4m bay,the stairs are 585mm wide with a rise of 230mm.



| ltem No. | Description               | Length | Weight | Рас  | kaging |
|----------|---------------------------|--------|--------|------|--------|
|          |                           |        | kgs    | Qty. | Туре   |
| AS-KAS10 | 1.0m Rise Aluminum Stair  | 2.44   | 20     | 24   | Rack   |
| AS-KAS15 | 1.5m Rise Aluminium Stair | 2.44   | 35     | 24   | Rack   |
| AS-KAS20 | 2.0m Rise Aluminium Stair | 2.44   | 37     | 24   | Rack   |

### Stair Handrails

The stair handrails are used to provide handrails on the inner side and outer side of the Aluminium Stair Platforms.

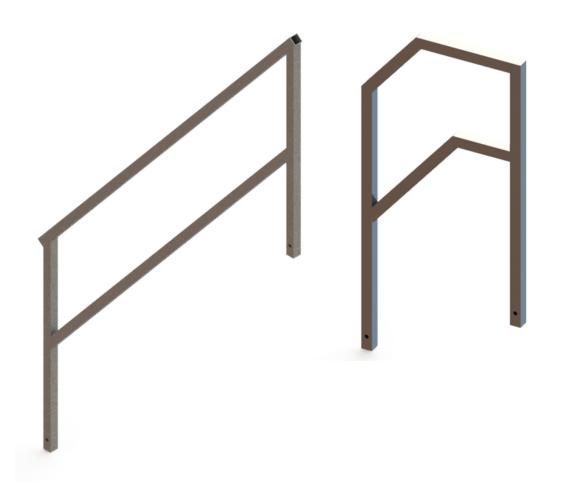

| ltem No. | Description           | Length<br>Meters | Weight | Pack | aging |
|----------|-----------------------|------------------|--------|------|-------|
|          |                       |                  | kgs    | Qty. | Туре  |
| AS-KSIH  | Intermediate Handrail | 1.2              | 7.5    | 30   | Rack  |
| AS-KSEH  | Exit Handrail         | 0.5              | 4.5    | 30   | Rack  |

#### Aluminum Stretcher Stair

The aluminum stretcher stairs are pre-fabricated and designed to fit in a 1.2m x 2.4m bay with a 1.0m or 2.0m rise (lift).

The stairs are 585mm wide with a rise of 230mm. Two stairs will fit perfectly side by side on a 1.2m bay.



| ltem No. |                                     | Length | Weight | Pack | aging |
|----------|-------------------------------------|--------|--------|------|-------|
|          |                                     | Meters | kgs    | Qty. | Туре  |
| AS-KASS1 | 1.0m Rise Aluminium Stretcher Stair | 2.44   | 20     | 60   | Rack  |
| AS-KASS2 | 2.0m Rise Aluminium Stretcher Stair | 2.44   | 36     | 60   | Rack  |

19

Address: 388 Dongwu South Road, Suzhou City, China 215168 Tel: +86 512 6670 0084 | Web: www.apacscaffold.com | Email: info@apacscaffold.com

#### Solid Base Jack

Ringlock adjustable base jack is used for leveling the scaffold-standards at the same height. OD: 34mm. Surface treatment: Hot dip galvanized or Electroplated.



| ltem No. | Description     | Length | Weight | Pack | aging |
|----------|-----------------|--------|--------|------|-------|
|          |                 | Meters | kgs    | Qty. | Туре  |
| AS-KSBJ  | Solid Base Jack | 0.65   | 6.5    | 500  | Rack  |

### Swivel Base Jack

Swivel Jack provides stability for uneven surfaces. The jacks has 180 degree rotation for extra flexibility. Made from heavy duty steel and galvanized to last longer.



| ltem No.  | Description      | Length | Weight | Pack | aging |
|-----------|------------------|--------|--------|------|-------|
| item ite. |                  | Meters | kgs    | Qty. | Туре  |
| AS-KSBJ   | Swivel Base Jack | 0.65   | 7      | 500  | Rack  |

**VAPAC** 

### Scaffold U Head Jack

U shaped head to support a standard or vertival pole over a scaffold standard. It is attached to a solid thread rod. which is 500mm long and 34 mm OD.



| ltem No. | Description           | Length | Weight | Pack | aging |
|----------|-----------------------|--------|--------|------|-------|
|          |                       | Meters | kgs    | Qty. | Туре  |
| AS-KUHJ  | Kwikstage U Head Jack | 0.65   | 9      | 500  | Rack  |

#### **End Toe Board Bracket**

End Toe Board brackets also called toe board Clips are fabricated brackets placed on the outside of a scaffold standard to allow toe boards to be installed .



| ltem No. | Description           | Length | Weight | Pack | aging |
|----------|-----------------------|--------|--------|------|-------|
|          |                       | Meters | kgs    | Qty. | Туре  |
| AS-KETBB | End Toe Board Bracket | /      | 1      | 1000 | Cage  |

**VAPAC** 

#### **Toe Board Bracket**

Toe baord brackets also known as toe board clips are Clamped to the standard with a captive wedge to hold the batten toe board vertically in place.



| ltem No. | Description       | Length | Weight | Pack | aging |
|----------|-------------------|--------|--------|------|-------|
|          |                   | Meters | kgs    | Qty. | Туре  |
| AS-KTBB  | Toe Board Bracket | /      | 0.85   | 1000 | Cage  |

#### **Double C Clips**

Used to Join Kwikstage scaffolding Standards Back to Back for more stability and steenght to the scaffold structure.



| ltem No. | Description              | Length | Weight | Pack | aging |
|----------|--------------------------|--------|--------|------|-------|
|          |                          | Meters | kgs    | Qty. | Туре  |
| AS-KDCC  | Kwikstage Double C Clips | 0.3    | 1.5    | 1000 | Cage  |

#### Gaurdrail Post

Used for edge protection slabs or balconies. Bolted into concrete with 14mm Dyna Bolts. ÊCompatible with all sizes of ledgers which makes it very versatile.



| ltem No.    | Description              | Length | Weight | Pack | aging |
|-------------|--------------------------|--------|--------|------|-------|
| inclinitio. |                          | Meters | kgs    | Qty. | Туре  |
| AS-KGP120   | Kwikstage Guardrail Post | 1.2    | 10     | 150  | Rack  |

26

Address: 388 Dongwu South Road, Suzhou City, China 215168 Tel: +86 512 6670 0084 | Web: www.apacscaffold.com | Email: info@apacscaffold.com

#### LVL Scaffold Planks

LVL Scaffold planks are Structural laminated veneer lumber and designed to be used as a non-modular scaffold plank as a part of a working platform in accordance with the requirements of AS/NZS 1576.1 and AS/NZS 1577.



| ltem No. Description | Description             | Length | Weight | Pack | aging |
|----------------------|-------------------------|--------|--------|------|-------|
| inclinitio.          | Description             | Meters | kgs    | Qty. | Туре  |
| AS-KLSP120           | 1.2m LVL Scaffold Plank | 1.2    | 6.7    | 75   | Rack  |
| AS-KLSP150           | 1.5m LVL Scaffold Plank | 1.5    | 8.4    | 75   | Rack  |
| AS-KLSP180           | 1.8m LVL Scaffold Plank | 1.8    | 10.0   | 75   | Rack  |
| AS-KLSP240           | 2.4m LVL Scaffold Plank | 2.4    | 13.4   | 75   | Rack  |
| AS-KLSP300           | 3.0m LVL Scaffold Plank | 3.0    | 16.8   | 75   | Rack  |
| AS-KLSP360           | 3.6m LVL Scaffold Plank | 3.6    | 20.1   | 75   | Rack  |
| AS-KLSP480           | 4.8m LVL Scaffold Plank | 4.8    | 26.9   | 75   | Rack  |

**APAC** 

#### **Fire Retardant Containment Mesh**

The fire retardant containment mesh is a specially designed system that effectively encloses scaffolding from the inside, ensuring the safety of workers at height.



| ltem No. | Description                     | Length | Weight | Pack | aging  |
|----------|---------------------------------|--------|--------|------|--------|
|          |                                 | Meters | kgs    | Qty. | Туре   |
| AS-KFRM1 | 1.95m x 10m FR Containment Mesh | 1.95   | 15.6   | 8    | Bundle |
| AS-KFRM2 | 0.95m x 10m FR Containment Mesh | 0.95   | 7.6    | 16   | Bundle |

**PAPAC** 

28

Address: 388 Dongwu South Road, Suzhou City, China 215168 Tel: +86 512 6670 0084 | Web: www.apacscaffold.com | Email: info@apacscaffold.com

#### **Chain Wire & Scaffmesh**

This chain wire & scaffmesh consists of a combination of hot-dip galvanized chain link wire and scaffolding mesh for use on scaffolding edges to prevent debris from falling.



| ltem No.  | Description                         | Length | Weight | Pack | aging |
|-----------|-------------------------------------|--------|--------|------|-------|
|           |                                     | Meters | kgs    | Qty. | Туре  |
| AS-KCWS10 | 1.8m x 10m Chain Wire and Scaffmesh | 10     | 20     | 60   | Rack  |
| AS-KCWS15 | 1.8m x 15m Chain Wire and Scaffmesh | 15     | 31     | 60   | Rack  |

29

Address: 388 Dongwu South Road, Suzhou City, China 215168 Tel: +86 512 6670 0084 | Web: www.apacscaffold.com | Email: info@apacscaffold.com

### Scaffold Rack

A steel structure built to hold goods in a stable fashion while being lifted by a forklift to stock, stack-up and transport.



| ltem No. | Description             | Length | Width  | Weight |
|----------|-------------------------|--------|--------|--------|
|          |                         | Meters | Meters | kgs    |
| AS-KSR   | Kwikstage Scaffold Rack | 0.9    | 0.9    | 35     |

**ØAPAC** 30

### Scaffold Cage

A steel structure built to hold goods in a stable fashion while being lifted by a forklift to stock, stack-up and transport.



| ltem No. | Description             | Length | Width  | Weight |
|----------|-------------------------|--------|--------|--------|
|          |                         | Meters | Meters | kgs    |
| AS-KSC   | Kwikstage Scaffold Cage | 0.9    | 0.9    | 65     |

**ØAPAC** 31



# KWIKSTAG SYSTEM

### [ ADDRESS]

388 Dongwu South Rd., Suzhou City, R.P China 215168

[ **Phone]** +86 512 6670 0084

[ EMAIL ] info@apacscaffold.com

[WEB] www.apacscaffold.com

